

Customer No.	026418	
Attorney's Docket No.:	GK-EIS-1041 / 500593.20033	
U.S. Application No.:	09/830756	
International Application No.:	PCT/EP99/07869	
International Filing Date:	OCTOBER 16, 1999	16 OCTOBER 1999
Priority Date Claimed:	OCTOBER 30, 1998	30 OCTOBER 1998
Title of Invention:	MICROPHONE	
Applicant(s) for (DO/EO/US):	Heinz EPPING, Manfred BLEICHWEHL and Artur SEEHAFFER	

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

- ☒ 1. This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
- ☐ 2. This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
- ☐ 3. This express request to begin national examination procedures [35 U.S.C. 371 (f)] at any time rather than delay examination until the expiration of the applicable time limit set forth in 35 U.S.C. 371(b) and PCT Articles 22 and
- ☐ 4. A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
- ☒ 5. A copy of the International Application as filed [35 U.S.C. 371(c)(2)]
 - a) x is transmitted herewith (required only if not transmitted by the International Bureau)
 - b) has been transmitted by the international Bureau
 - c) is not required, as the application was filed in the United States Receiving Office (RO/US)
- ☒ 6. A translation of the International Application into English [35 U.S.C. 371(c)(2)]
- ☐ 7. Amendments to the claims of the International Application under PCT Article 19 [35 U.S.C. 371(c)(3)]
 - a) are transmitted herewith (required only if not transmitted by the International Bureau)
 - b) have been transmitted by the International Bureau
 - c) have not been made; however, the time limit for making such amendments has **NOT** expired.
 - d) have not been made and will not be made
- ☐ 8. A translation of the amendments to the claims under PCT Article 19 [35 U.S.C. 371(c)(3)]
- ☒ 9. An **UNSIGNED** Oath or declaration of the inventor(s) [35 U.S.C. 371(c)(4)] **Executed Decl/POA TO FOLLOW**
- ☒ 10. A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 [35 U.S.C. 371(c)(5)]

Items 11. to 16. Below concern other document(s) or information included:

- ☒ 11. An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98
- ☐ 12. An Assignment document for recording. A separate cover sheet (PTO-1619A) in compliance with 37 CFR 3.28 and 3.31 is included.
- ☒ 13. X A **FIRST** preliminary amendment (Claims 20/1)
- A **SECOND** or **SUBSEQUENT** preliminary amendment
- ☒ 14. A **substitute specification w/Abstract**
- ☐ 15. A change of power of attorney and/or address letter
- ☒ 16. (other items or information) **PCT/RO/101, PCT/RO/106, 105 18NOV99, 1st page of WO 00/27165 11MAY00, PCT/IPEA/401 29MAY00, PCT/IB/332 28JUL00, PCT/IPEA/405 28SEP00, PCT/IPEA/408 14NOV00, PCT/IPEA/406 18JAN01, Search Report (PCT/ISA/220 and 210) 10APR00 and PTO-1449 w/4 references and including 2 English Abstracts**

EXPRESS MAIL No.: **EL 758 525 037 US**

Deposited: **April 30, 2001**

I hereby certify that this correspondence is being deposited with the United States Postal Service Express mail under 37 CFR 1.10 on the date indicated above and is addressed to: BOX PCT, Commissioner for Patents, Washington, DC 20231.

Ruth Montalvo

/Ruth Montalvo Date: **April 30, 2001**

09/830756^{Page 2}

U S Application No. (if known, see 37 C.F.R. 1.50):

International Application No.: **PCT/EP99/07869**Attorney's Docket No: **GK-EIS-1041 / 500593.20033**

CALCULATIONS

PTO USE ONLY

☒ 17. The following fees are submitted:**BASIC NATIONAL FEE [37 CFR 1.492(a)(1)-(5)]**

JC18 Rec'd PCT/PTO 30 APR 2001

- ☒ Search Report has been prepared by the EPO or JPO..... \$ 860.00
- ☐ International preliminary examination fee paid to USPTO [37 CFR 1.482]..... \$ 690.00
- ☐ No International preliminary examination fee paid to USPTO [37 CFR 1.482] but International search fee paid to USPTO [37 CFR 1.445(a)(2)]..... \$ 710.00
- ☐ Neither International preliminary examination fee [37 CFR 1.482] nor International search fee [37 CFR 1.445(a)(2)] paid to USPTO..... \$ 1,000.00
- ☐ International preliminary examination fee paid to USPTO [37 CFR 1.482] and all claims satisfied provisions of PCT Article 33(1)-(4)..... \$ 100.00

ENTER APPROPRIATE BASIC FEE AMOUNT:**\$860.00**

Claims	Number Filed		Number Extra	Rate
Total Claims (Prel. Amdt)	20	-20		x \$ 18. =
Indep. Claims	1	-03		x \$ 80. =
<input type="checkbox"/> Multiple Dependent Claim(s) (if applicable)				+ \$ 270. =

TOTAL OF ABOVE CALCULATIONS:**\$860.00**Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date [37 CFR 1.492(e)]**TOTAL OF ABOVE CALCULATIONS:****\$860.00**

Applicant claims Small Entity Status [See 37 CFR 1.27] Reduction by 1/2 for filing by small entity

SUBTOTAL:**\$860.00**Processing fee of \$130.00 for furnishing the English Translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date [37 CFR 1.492(f)]**TOTAL NATIONAL FEE:****\$860.00**

Fee for recording the enclosed assignment [37 CFR 1.21(h)] The assignment must be accompanied by an appropriate cover sheet (PTO-1595) [37 CFR 3.28, 3.31]. \$ 40.00 per property +

TOTAL FEE(S):**\$860.00**AMOUNTS TO BE
REFUNDED OR CHARGED**REFUNDED
CHARGED**\$
\$

(Please note the filing fee is based on the claims in the Preliminary Amendment)

- ☒ Check in the amount of **\$ 860.00** to cover the above fees is enclosed. (The Commissioner is hereby authorized to charge any additional fees required with this submission or to credit any overpayment to Deposit Account No: 50-1529.)

NOTE: Where an appropriate time limit under 36 CFR 1.494 or 1.495 has not been met, a petition to revive [37 CFR 1.137(a) or (b)] must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:**Gerald h. Kiel, Esq.** (Customer No. 026418)
 Reed Smith LLP
 375 Park Avenue
 New York, NY 10152

 Gerald H. Kiel
 Name (Tel. (212) 521-5400)

Signature

 25,116
 Reg. No.


 April 30, 2001
 Date

09/830756

JC18 Rec'd PCT/PTO 3 0 APR 2001

EXPRESS MAIL mailing label No. EL 758 525 037 US Date of Deposit April 30, 2001

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is address to the Commissioner for Patents, Washington, D.C. 20231.


Ruth Montalvo


Date

Docket No.:GK-EIS-1041/500593.20033

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Heinz EPPING, Manfred BLEICHWEHL and Artur SEEHAFFER
Serial No.: Unknown (Int'l Appln. PCT/EP99/07869
filed October 16, 1999)
Filed: Concurrently herewith
For: MICROPHONE

PRELIMINARY AMENDMENT

Commissioner for Patents
Washington, D.C. 20231

Sir:

Please amend the above-identified application, filed simultaneously herewith, as follows:

IN THE SPECIFICATION

Cancel the present specification and substitute therefor the enclosed substitute specification.

IN THE CLAIMS

Cancel claims 1-21 and add new claims 22-41, reading as follows:

--22. A microphone comprises:

a diaphragm which has a first diaphragm surface which is oriented towards a sound source and on which sound waves impinge and a second diaphragm surface which is at least partly acoustically separated from the first diaphragm surface, and which faces away from the sound source;

at least one, slot-shaped, sound inlet, through which sound waves can go to the second diaphragm surface and which forms substantially an acoustic inductance so that at least a part of the sound waves to be picked up is passed with a delay to the second diaphragm surface; and

at least one damping element;

said sound inlet having an acoustic resistance which is less than the acoustic resistance of the damping element.

23. The microphone as set forth in claim 22, wherein the damping element is formed by a sound passage which is provided with acoustic damping material and which connects a cavity to the volume delimited by the second diaphragm surface.

24. The microphone as set forth in claim 22, wherein the sound inlet is of a substantially rectangular cross section.

25. The microphone as set forth in claim 24, wherein the height of the sound inlet is less than the length thereof, wherein the sound flow is along the longitudinal direction of the sound inlet and the length of the sound inlet is again less than the width thereof.

26. The microphone as set forth in claim 25, wherein the width of the sound inlet substantially corresponds to the periphery of the microphone.

27. The microphone as set forth in claim 26, wherein the sound inlet is interrupted only by support portions.

28. The microphone as set forth in claim 22, wherein the diaphragm is connected to a diaphragm fixing portion.

29. The microphone as set forth in claim 23, wherein a closure element is arranged in front of a mouth of the sound duct and has an opening which substantially correspond to the mouth opening of the sound passage and which is provided with the acoustic damping material.

30. The microphone as set forth in claim 28, wherein the diaphragm fixing portion has an orifice which leads from a rear side of the microphone which faces away from a sound source to the second diaphragm surface and which is substantially closed by a sealing element, the slot-shaped sound inlet being formed between the sealing element and the diaphragm fixing portion.

31. The microphone as set forth in claim 30, wherein the sealing element comprises a porous material.

32. The microphone as set forth in claim 30, wherein the porous material is a sintered material.

33. The microphone as set forth in claim 30, wherein the cross section of the slot-shaped sound inlet is substantially formed by a recess in the diaphragm fixing portion, the length of the sound inlet being substantially predetermined by the thickness of the sealing element.

34. The microphone as set forth in claim 30, wherein the sealing element is substantially annular.

35. The microphone as set forth in claim 34, wherein the diaphragm fixing portion has an annular groove in which the sealing element is arranged.

36. The microphone as set forth in claim 34, wherein the cross section of the slot-shaped sound inlet is predetermined by the difference in size between the inside diameter of the diaphragm fixing portion and the outside diameter of the sealing element.

37. The microphone as set forth in claim 30, wherein the sealing element is in one piece with the closure element.

38. The microphone as set forth in claim 28, wherein the diaphragm fixing portion substantially encloses the second diaphragm surface and the sound inlet is formed between a holding portion on the diaphragm and the diaphragm fixing portion.

39. The microphone as set forth in claim 38, wherein the holding portion is a diaphragm ring connected to the diaphragm.

40. The microphone as set forth in claim 39, wherein the slot-shaped sound inlet is formed substantially by recesses in the diaphragm ring.

41. The microphone as set forth in claim 28, wherein a casing portion which is connected to the diaphragm fixing portion and which substantially encloses the second diaphragm surface, the sound inlet being formed between the diaphragm fixing portion and the casing portion.--

IN THE ABSTRACT OF THE DISCLOSURE

Cancel the present Abstract of the Disclosure and substitute therefor the enclosed Abstract of the Disclosure.


REMARKS

Claims 1-21 have been cancelled and new claims 22-41 have been added. The amendments to the claims have been made only to improve the form of the claims for examination purposes.

The specification and abstract have been amended to conform it to U.S. format.

An early and favorable action on the merits is respectfully requested.

Respectfully submitted,

By: 
Gerald H. Kiel
Reg. No. 25,116

April 30, 2001
REED SMITH LLP
375 Park Avenue
New York, NY 10152-1799
GHK:jl
Enc.: Substitute Specification
Abstract of the Disclosure

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Customer No.	026418	
Attorney's Docket No.:	GK-EIS-1041 / 500593.20033	
U.S. Application No.:		
International Application No.:	PCT/EP99/07869	
International Filing Date:	OCTOBER 16, 1999	16 OCTOBER 1999
Priority Date Claimed:	OCTOBER 30, 1998	30 OCTOBER 1998
Title of Invention:	MICROPHONE	
Applicant(s) for (DO/EO/US):	Heinz EPPING, Manfred BLEICHWEHL and Artur SEEHAFFER	

SUBSTITUTE
SPECIFICATION
with ABSTRACT

Docket No.: GK-EIS-1041/500593.20033

BACKGROUND OF THE INVENTION

5 a) Field of the Invention

The invention concerns a microphone comprising a diaphragm which has a first diaphragm surface which is preferably towards a sound source and on which sound waves impinge and a second diaphragm surface which is at least partially acoustically separated from the first
10 diaphragm surface, and which preferably faces away from the sound source, at least one, preferably slot-shaped, sound inlet, through which sound waves can go to the second diaphragm surface and which forms substantially an acoustic inductance so that at least a part of the sound waves to be picked up is passed with a delay to the second diaphragm
15 surface, and at least one damping element.

b) Description of the Related Art

U.S. Patent No. 3 585 317 A discloses such a microphone, in which an acoustic resistance is formed by the slot-shaped sound inlet, in order to
20 damp the sound which passes through the slot-shaped sound inlet. The directional effect of the microphone can be influenced by the sound inlet between the air volume behind the diaphragm and the outside air. So that the slot-shaped sound inlet has the required acoustic impedance its width is small in relation to length. To achieve acoustic inductance, the
25 slot-shaped sound inlet is provided with inserts of hardenable wax.

DE 22 17 051 also discloses a microphone which has a slot-shaped sound inlet to form an acoustic resistance. In that case, the sound inlet is in the form of a groove-shaped recess in the magnet system which is made from sintered material. In such a microphone the directional effect
30 of the microphone is heavily frequency-dependent and can be used mostly only for low frequencies. Production of the corresponding slot-shaped

sound inlets in the magnet system of sintered material requires special tools, and tuning of the directional effect by varying the slot-shaped sound inlet can be implemented only by replacing the entire magnet system.

5 OBJECT AND SUMMARY OF THE INVENTION

 The object of the present invention is to develop a microphone of the kind set forth in the opening part of this specification, in such a way that it has a predetermined directional effect substantially over the entire frequency response curve or characteristic and in that respect its acoustic
10 network is dependent substantially on the magnitude of the acoustic inductance and that of the damping element.

 In a microphone of the kind set forth in the opening part of this specification, that object is attained in that the acoustic resistance which occurs in the sound inlet is less than the acoustic resistance of the
15 damping element.

 In such a microphone, the directional effect is achieved by a delay in the sound which passes in through the rear sound inlet. The delay in the sound is achieved by means of an acoustic network which has essentially an inductance formed by the slot-shaped sound inlet and a
20 separate damping or attenuating element which forms an acoustic resistance.

 The advantages of the invention are in particular that it implements a microphone with a directional effect which is constant substantially over the entire frequency range. In addition the acoustic network formed by
25 the acoustic inductance and the damping element can be easily and precisely tuned so that the directional effect of the microphone can be predetermined within wide limits.

 Admittedly, a parasitic acoustic resistance occurs in the sound inlet of the microphone according to the invention. In order however to make
30 the acoustic network substantially dependent on the magnitude of the acoustic inductance and that of the separate damping element, the sound

inlet in the microphone according to the invention is of such a configuration that the acoustic resistance which occurs in the sound passage is lower than the acoustic resistance of the damping element.

5 A preferred embodiment of microphone according to the invention provides that the damping element is formed by a sound passage which is provided with acoustic damping material and which connects a cavity to the volume delimited by the rear diaphragm surface. Tuning of the damping element is predetermined essentially by the size of the volume and the acoustic resistance of the sound passage which connects the
10 cavity to the volume delimited by the rear diaphragm surface.

In a further preferred embodiment the sound inlet is of a substantially rectangular cross-section. That cross-sectional shape is easy to dimension in regard to the design of a microphone according to the invention and is easy to carry into effect in terms of manufacture. In that
15 respect, the height of the sound inlet is particularly desirably smaller than its length, in which case the sound flow takes place along the longitudinal direction of the sound inlet and the length of the sound inlet is in turn smaller than the width thereof. The parasitic resistance of the sound inlet is held at a low level by virtue of the fact that the width of the sound inlet
20 is large in relation to the length. In a desirable development the width of the sound inlet corresponds substantially to the periphery of the microphone. In that case, the sound inlet is interrupted only by support portions which are provided for the mechanical stability of the microphone and in particular the sound inlet. In this embodiment the sound inlet is
25 thus formed not by narrow and long passages but by a substantially peripherally extending slot which has an only slight parasitic acoustic resistance and a predetermined acoustic inductance.

In a further preferred embodiment the diaphragm is connected to a diaphragm fixing portion. The diaphragm fixing portion serves to carry the
30 diaphragm and to orient it by way of a suitable magnet system in such a

way that an oscillating coil fixed to the diaphragm engages into an air gap provided in the magnet system.

In a further embodiment the microphone includes a closure element which is arranged in front of a mouth opening of the sound passage and
5 which has an opening which substantially corresponds to the mouth opening of the sound passage and which is provided with the acoustic damping material. The closure element serves substantially to carry the acoustic damping material and to hold it in front of the mouth opening of the sound passage. The acoustic resistance of the damping element can
10 be particularly advantageously changed by interchanging only the closure element and replacing it by another closure element with a different acoustic resistance. In that way microphone casings of the same structure can also be tuned differently by means of suitable closure elements.

15 In order to form the slot-shaped sound inlet through which sound waves can pass to the rear diaphragm surface, in a preferred embodiment of the microphone according to the invention the diaphragm fixing portion has an orifice which leads from the exterior to the rear diaphragm surface and which is substantially closed by a sealing element. In that
20 arrangement the orifice is reduced by the sealing element to such an extent that the slot-shaped sound inlet is formed between the sealing element and the diaphragm fixing portion.

It is particularly advantageously possible in that way for the dimensions of the slot-shaped sound inlet to be predetermined by the
25 sealing element which can be dimensioned and produced, independently of the diaphragm fixing portion. The microphone according to the invention can thus in turn be tuned in the desired manner by means of an inexpensive component which is simple to manufacture. There is therefore no longer any need for structural changes to the casing of the
30 microphone or to other components which are to be manufactured with expensive tools. In that case, in a desirable development, the sealing

element comprising a porous material and in particular a sintered material. Such material has a high level of internal damping which can improve the acoustic properties of the microphone and it can be easily put into a desired shape.

5 In a desirable development the cross-section of the slot-shaped sound inlet is essentially formed by a recess in the diaphragm fixing portion, the length of the sound inlet being essentially predetermined by the thickness of the sealing element. In that case, the sealing element is preferably of a substantially annular configuration and fits in an annular
10 groove provided in the diaphragm fixing portion. The cross-section of the slot-shaped sound inlet can be predetermined in a simple fashion by the difference in size between the inside diameter of the diaphragm fixing portion and the outside diameter of the sealing element, in which case recesses do not have to be provided at the diaphragm fixing portion. That
15 makes it possible to provide slots of different dimensions, with the same diaphragm fixing portion, insofar as only the annular sealing element is replaced by a different one involving a different outside diameter.

 If however the slot-shaped sound inlet is completely closed by the sealing element, then only the damping element is effective and the
20 directional characteristic of the microphone approaches a spherical shape. Therefore the microphone according to the invention also affords the possibility of embodying a microphone with a spherical directional characteristic, with the same design configuration and structure in respect of the microphone capsule. If a directional characteristic of that kind is to
25 be implemented, then desirably the slot-shaped sound inlet can also be entirely omitted, in which case the other advantageous features described herein can nonetheless be provided in such an embodiment.

 In a particularly desirable feature in that case the sealing element which substantially predetermines the size of the slot-shaped sound inlet
30 is formed in one piece with the closure element which is arranged in front of the mouth opening of the sound passage and which carries the acoustic

damping material. In that way, both the acoustic inductance by virtue of influencing the dimensions of the slot-shaped sound inlet and the acoustic resistance of the damping element by virtue of the choice of the acoustic damping material adopted can be particularly advantageously
5 predetermined by means of a single component.

In an alternative embodiment the diaphragm fixing portion substantially surrounds the rear diaphragm surface and the sound inlet is formed between a holding portion provided on the diaphragm and the diaphragm fixing portion. The diaphragm fixing portion is essentially the
10 portion of the diaphragm, with which the latter is connected to the diaphragm fixing portion. In a desirable development the holding portion is formed by a diaphragm ring connected to the diaphragm. Such a diaphragm ring advantageously enhances the stability of the diaphragm and can be easily manufactured. That is found to be advantageous in
15 particular for the reason that, in a desirable development of the invention, provided in the diaphragm ring are recesses which substantially form the slot-shaped sound inlet. The diaphragm fixing portion can therefore have a substantially flat support contact surface for the diaphragm ring, wherein the dimensions of the slot-shaped sound inlet are predetermined
20 by the recesses in the diaphragm ring. This embodiment also provides that the size of the slot-shaped sound inlet is formed by a component which is convenient in terms of manufacture so that, with identical diaphragm fixing portions, it is possible to provide for tuning of the microphone by altering the diaphragm ring.

25 In a further alternative embodiment the diaphragm according to the invention has a casing portion which is connected to the diaphragm fixing portion and which substantially encloses the rear diaphragm surface, in which case the sound inlet is formed between the diaphragm fixing portion and the casing portion.

30 Advantageous developments of the invention are characterized by the features of the appendant claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is described by way of example hereinafter with reference to the drawings in which:

5 Figure 1 shows a view in cross-section through a first embodiment of a microphone according to the invention;

 Figure 2 is a view on an enlarged scale of a part of Figure 1;

 Figure 3 shows a plan view of a sealing element which is fitted in the embodiment shown in Figure 1;

10 Figure 4 shows a view in cross-section through the sealing element taken along line IV-IV in Figure 3;

 Figure 5 shows a second embodiment of the microphone according to the invention;

 Figure 6 is a view on an enlarged scale of a part of Figure 5;

15 Figure 7 is a plan view of a diaphragm ring which is fitted in the embodiment shown in Figure 5;

 Figure 8 is a view in cross-section of the diaphragm ring taken along line VIII-VIII in Figure 7;

 Figure 9 shows a third embodiment of the microphone according to
20 the invention; and

 Figure 10 shows a view on an enlarged scale of part of Figure 9.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

 Figure 1 shows a first embodiment of a microphone according to the
25 invention in cross-section, comprising a diaphragm 3, a diaphragm fixing portion 5, a magnet system 7 and a microphone cover 9. The diaphragm 3 is connected with its outer edge to the diaphragm fixing portion 5 and thereby centered over the magnet system 7. An oscillating coil 11 secured to the diaphragm 3 extends substantially transversely with
30 respect to the diaphragm 3 into an air gap 13 in the magnet system 7. On its side towards the diaphragm 3 the microphone cover 9 is substantially

matched to the contour of the diaphragm 3 and has a plurality of sound intake openings 15 through which sound to be picked up can impinge on the outside surface of the diaphragm 3. The sound intake openings 15 are covered by a sound-transmitting material 17 in order to protect the diaphragm from fouling and contamination, in particular dust and moisture.

Also shown in Figure 1 and in the detail in Figure 2 is the diaphragm fixing portion 5 which has an orifice 19 leading from the exterior to the rear surface of the diaphragm 3. Provided in the diaphragm fixing portion is an annular groove 21, with the orifice 19 being provided in the annular groove 21 in the region of the edge between the bottom and the wall. Fitted in the annular groove 21 is a corresponding annular sealing element 23 which substantially closes the orifice 19 except for a slot-shaped sound inlet 25.

The acoustic properties of the microphone can be predetermined to a wide extent by varying the geometrical dimensions of the slot-shaped sound inlet 25. In the described embodiments, identified as the length 28 is that dimension of the sound inlet 25, along which the sound flow essentially passes. The width is essentially determined along the periphery of the microphone, and the height 26 of the sound inlet is defined by the spacing of two complementary components (5, 23; 5, 37; 5, 51) which delimit the sound inlet 25. Basically, in the illustrated embodiments of the invention, the height 26 of the sound inlet 25 is less than its length 28 and the length 28 of the sound inlet 25 is in turn less than the width thereof.

The height 26 (defined in the radial direction) of the slot-shaped sound inlet 25 as shown in Figures 1 and 2 is in this case essentially predetermined by a recess 27 provided in the diaphragm fixing portion 5 and the length 28 is predetermined by the thickness of the annular sealing element 23.

Provided on the annular sealing element 23 are ducts 29 which respectively form a sound passage, in a portion-wise manner. The ducts are provided with an acoustic damping material 31. The ducts 29 in the sealing element 23 connect the volume 32 delimited by the rear surface of the diaphragm 3 to a cavity 33 which is closed in an outward direction
5 (not shown).

The cavity 33, together with the acoustic damping material 31 arranged in the ducts 29 in the sealing element 23, forms a damping element, wherein the acoustic damping value on the one side depends on
10 the size of the cavity 33 while on the other side it depends on the acoustic properties of the ducts 29 and the damping material 31. The slot-shaped sound inlet 25 forms an acoustic inductance, the magnitude of which can be essentially predetermined by the geometrical dimensions involved. The acoustic inductance of the slot-shaped sound inlet 25, together with the
15 damping element, forms an acoustic network which passes a part of the sound waves to be picked up, with a delay to the rear diaphragm surface.

Figure 3 shows an annular sealing element which is used for example in the first embodiment of the microphone as shown in Figures 1 and 2. Figure 4 is a view of the annular sealing element in cross-section
20 taken along line IV-IV in Figure 3. The annular sealing element is of a substantially rectangular cross-section, with the sealing element 23 being provided with peripherally extending grooves 35 which are disposed in mutually opposite relationship on both sides. Provided in a portion-wise manner in the grooves 35 in the sealing element 23 are ducts 29 which
25 are of the same width as the peripherally extending grooves 35 and which are substantially in the form of a slot. Arranged within the ducts 29 is an acoustic damping material 31 with which it is possible to predetermine the acoustic resistance of the ducts 29 in the sealing element 23.

Figures 5 and 6 show a second embodiment of a microphone
30 according to the invention, Figure 5 showing a view in cross-section and Figure 6 showing a view on an enlarged scale of part of Figure 5. The

microphone shown in Figures 5 and 6, like the microphone 1 in accordance with the first embodiment, also has a diaphragm 3, a diaphragm fixing portion 5 which carries the diaphragm 3, a magnet system 7, a microphone cover 9, an oscillating coil 11, an air gap 13 which is provided in the magnet system 7 and into which the oscillating coil 11 secured to the diaphragm 3 at least partially engages, and a sound intake opening 15 which is covered by a sound-transmitting material 17.

In contrast to the first embodiment, in the case of the microphone 1 in accordance with the second embodiment the rear surface of the diaphragm 3 is substantially enclosed by the diaphragm fixing portion 5. The diaphragm fixing portion 5 has an annular groove 21 in a volume 32 which is delimited by the rear surface of the diaphragm 3. An annular sealing element 23 is arranged in the annular groove 21. The sealing element 23 is provided with ducts which are disposed in opposite relationship to adjoining sound passages which are formed in the diaphragm fixing portion 5 and which connect a cavity 33 (not shown completely) which is also enclosed by the diaphragm fixing portion 5, to the volume delimited by the rear diaphragm surface. The annular sealing element carries acoustic damping material 31 with which the acoustic resistance of the damping element formed by the cavity 33 and the acoustic damping material 31 can be predetermined.

A diaphragm ring 37 of a substantially rectangular cross-section is secured to the outer, peripherally extending edge of the diaphragm 3. Formed between the diaphragm ring 37 and the diaphragm fixing portion 5, in a portion-wise manner, is a slot-shaped sound inlet 25 through which sound waves can pass to the rear diaphragm surface. The slot-shaped sound inlet 25 is formed by virtue of the diaphragm ring 37 having shallow recesses 39 at its surface which is towards the diaphragm fixing portion 5. In this case, the length of the slot-shaped sound inlet 25 is determined by the part of the diaphragm fixing portion 5, which is in opposite relationship to the shallow recess 39 of the diaphragm ring 37. The height 26 of the

slot-shaped sound inlet 25 can be predetermined by the size of the recess 39.

Figures 7 and 8 show a view in detail of a diaphragm ring according to the invention, more specifically Figure 7 being a view from below and Figure 8 being a view in cross-section taken along line VIII-VIII. In the illustrated embodiment of the diaphragm ring 37, eight recesses 39 are arranged uniformly around the periphery. The recesses 39 extend radially outwardly from the inner peripherally extending edge, on the underneath surface of the diaphragm ring, the outer downwardly disposed edge of the diaphragm ring 37 being maintained continuously.

The microphone in a third embodiment which is shown as a view in cross-section in Figure 9 and as a view on an enlarged scale in Figure 10 has a separate casing portion 51 which is connected to the diaphragm fixing portion 5 and which substantially encloses the rear diaphragm surface. Also provided in the housing portion 51 is the cavity 33 which is connected by a sound passage provided with acoustic damping material 31, to the volume 32 connected through the rear diaphragm surface. In this case, the sound passage is formed by mutually oppositely disposed orifices 53 and 55 in the diaphragm fixing portion 5 and in the casing portion 51, wherein the acoustic material 31 is arranged and held between the diaphragm fixing portion 5 and the casing portion 51.

Formed between the diaphragm fixing portion 5 and the casing portion 51 is the slot-shaped sound inlet which represents the acoustic inductance. The height 26 (defined in the axial direction) and the length 28 of the slot-shaped sound inlet are predetermined by the diaphragm fixing portion 5 and/or the casing portion 51.

While the foregoing description and drawings represent the present invention, it will be obvious to those skilled in the art that various changes may be made therein without departing from the true spirit and scope of the present invention.

CLAIMS

1. A microphone (1) comprising a diaphragm (3) which has a front diaphragm surface on which sound waves impinge and a rear diaphragm surface which is at least partially acoustically separated from the front diaphragm surface, and at least one, preferably slot-shaped, sound inlet (25), through which sound waves can go to the rear diaphragm surface, characterized in that the microphone (1) has at least one damping element (29, 31, 33) and the slot-shaped sound inlet (25) substantially forms an acoustic inductance so that at least a part of the sound waves to be picked up is passed with a delay to the rear diaphragm surface.

2. A microphone as set forth in claim 1 characterized in that the acoustic resistance occurring in the sound inlet (25) is less than the acoustic resistance of the damping element.

3. A microphone as set forth in claim 1 or claim 2 characterized in that the damping element is formed by a sound passage (29) which is provided with acoustic damping material (31) and which connects a cavity (33) to the volume (32) delimited by the rear diaphragm surface.

4. A microphone as set forth in one of the preceding claims characterized in that the sound inlet (25) is of a substantially rectangular cross-section.

5. A microphone as set forth in claim 4 characterized in that the height (26) of the sound inlet (25) is less than the length (28) thereof, wherein the sound flow is along the longitudinal direction of the sound inlet (25) and the length (28) of the sound inlet (25) is in turn less than the width thereof.

6. A microphone as set forth in claim 5 characterized in that the width of the sound inlet (25) substantially corresponds to the periphery of the microphone (1).

7. A microphone as set forth in claim 6 characterized in that the sound inlet (25) is interrupted only by support portions.

8. A microphone as set forth in one of the preceding claims characterized in that the diaphragm (3) is connected to a diaphragm fixing portion (5).

9. A microphone as set forth in claims 3 and 8 characterized by a closure element which is arranged in front of a mouth opening of the sound passage (29) and has an opening which substantially corresponds to the mouth opening of the sound passage (29) and which is provided with the acoustic damping material (31).

10. A microphone as set forth in claim 8 or claim 9 characterized in that the diaphragm fixing portion (5) has an orifice (19) which leads from the exterior to the rear diaphragm surface and which is substantially closed by a sealing element (23), the slot-shaped sound inlet (25) being formed between the sealing element (23) and the diaphragm fixing portion (5).

11. A microphone as set forth in claim 10 characterized in that the sealing element (23) comprises a porous material, in particular a sintered material.

12. A microphone as set forth in claim 10 or claim 11 characterized in that the cross-section of the slot-shaped sound inlet (25)

is substantially formed by a recess (27) in the diaphragm fixing portion (5), the length (28) of the sound inlet (25) being substantially predetermined by the thickness of the sealing element (23).

13. A microphone as set forth in one of claims 8 through 12 characterized in that sealing element (23) is substantially annular.

14. A microphone as set forth in claim 13 characterized in that the diaphragm fixing portion (5) has an annular groove (21) in which the sealing element (23) is arranged.

15. A microphone as set forth in claim 13 or claim 14 characterized in that the cross-section of the slot-shaped sound inlet (25) is predetermined by the difference in size between the inside diameter of the diaphragm fixing portion (5) and the outside diameter of the sealing element (23).

16. A microphone as set forth in one of claims 8 through 15 characterized in that the sealing element (23) is in one piece with the closure element.

17. A microphone as set forth in claim 8 or claim 9 characterized in that the diaphragm fixing portion (5) substantially encloses the rear diaphragm surface and the sound inlet (25) is formed between a holding portion (37) on the diaphragm and the diaphragm fixing portion (5).

18. A microphone as set forth in claim 17 characterized in that the holding portion (37) is a diaphragm ring (37) connected to the diaphragm (3).

19. A microphone as set forth in claim 18 characterized in that the slot-shaped sound inlet (25) is formed substantially by recesses (39) in the diaphragm ring (37).

20. A microphone as set forth in claim 8 characterized by a casing portion (51) which is connected to the diaphragm fixing portion (5) and which substantially encloses the rear diaphragm surface, the sound inlet (25) being formed between the diaphragm fixing portion (5) and the casing portion (51).

21. A microphone (1) comprising a diaphragm (3) which has a front diaphragm surface on which sound waves impinge and a rear diaphragm surface acoustically separated from the front diaphragm surface, characterized in that the microphone (1) has at least one damping element (29, 31, 33) formed by a sound passage (29) which is provided with acoustic damping material (31) and which connects a cavity (33) to the volume (32) delimited by the rear diaphragm surface.

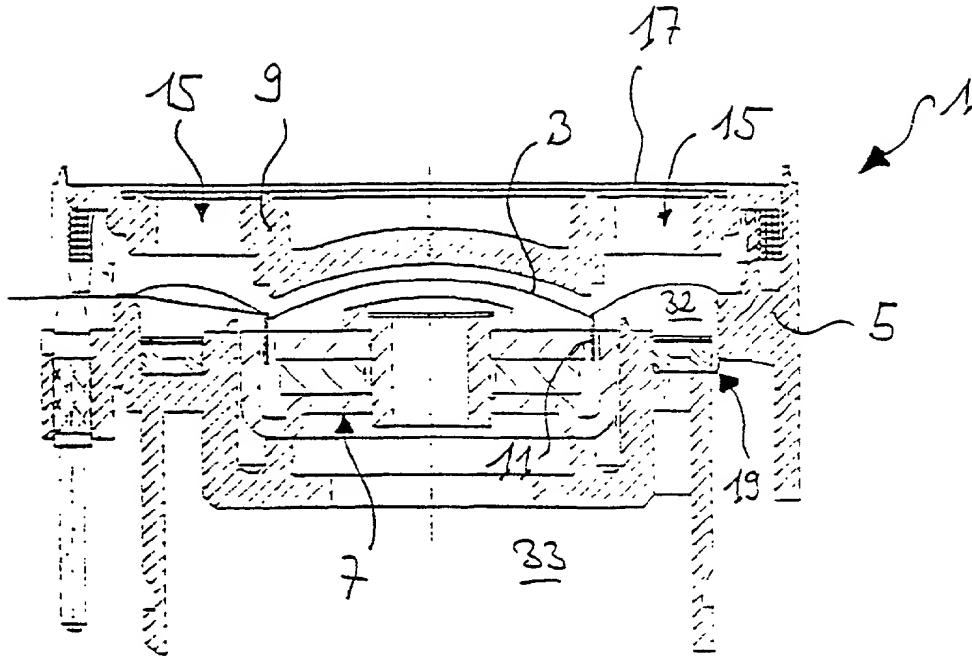


Fig. 1

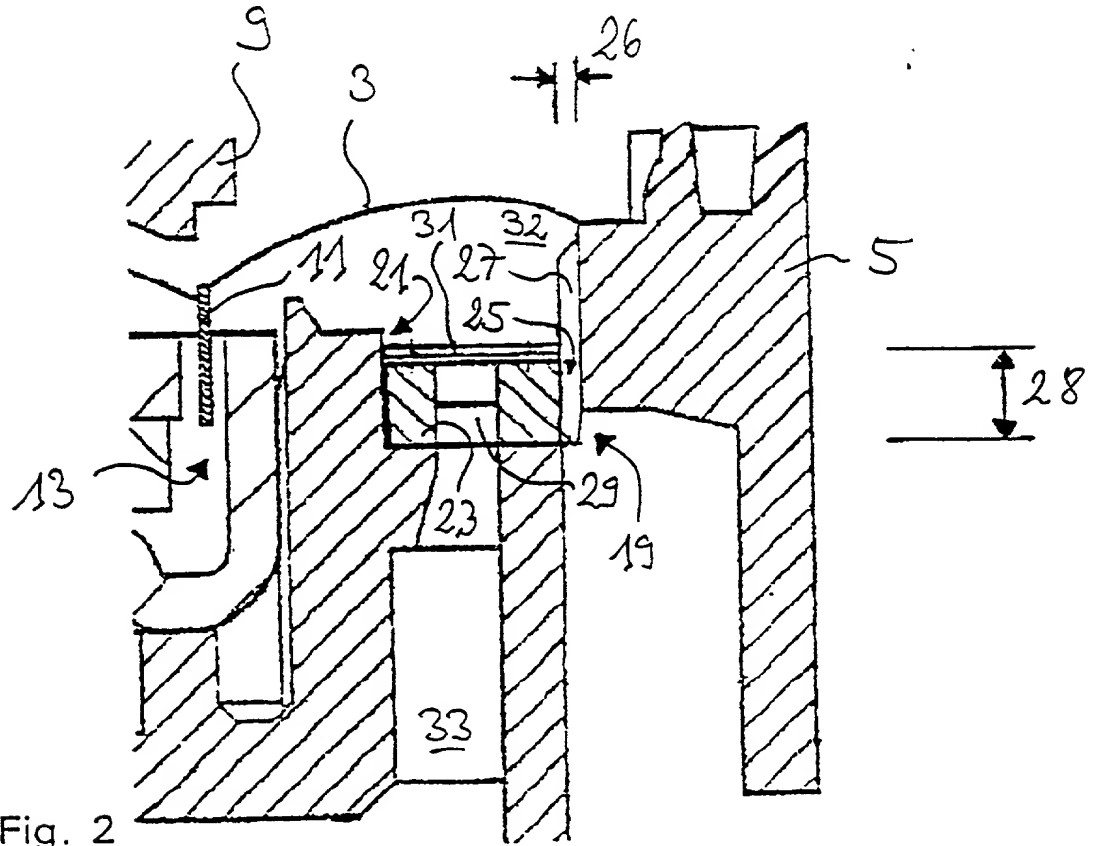


Fig. 2

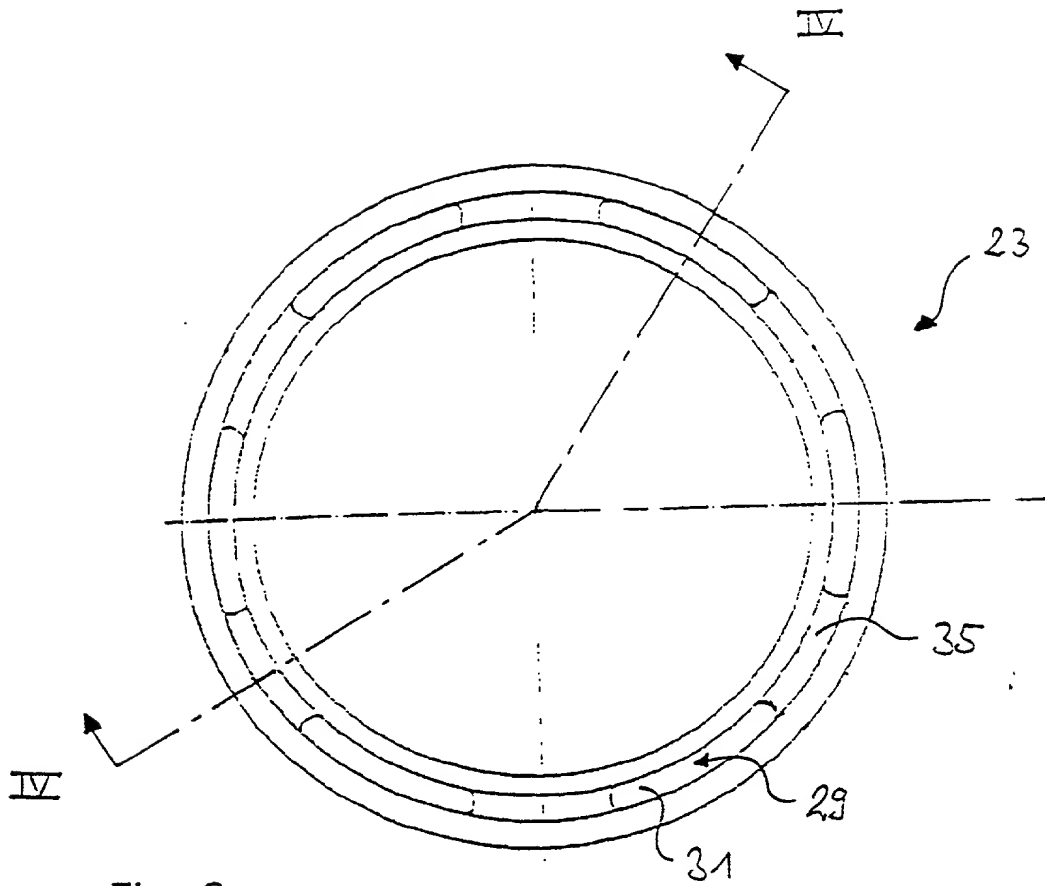


Fig. 3

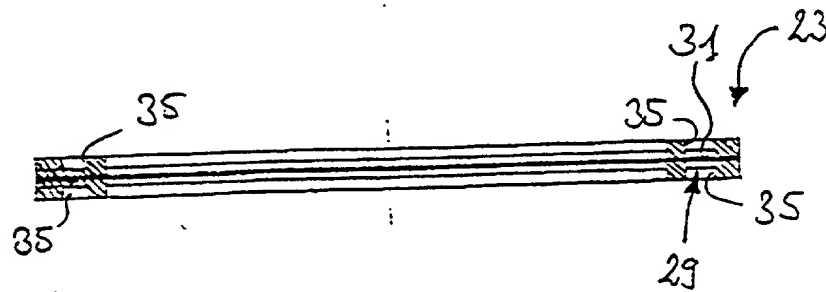


Fig. 4

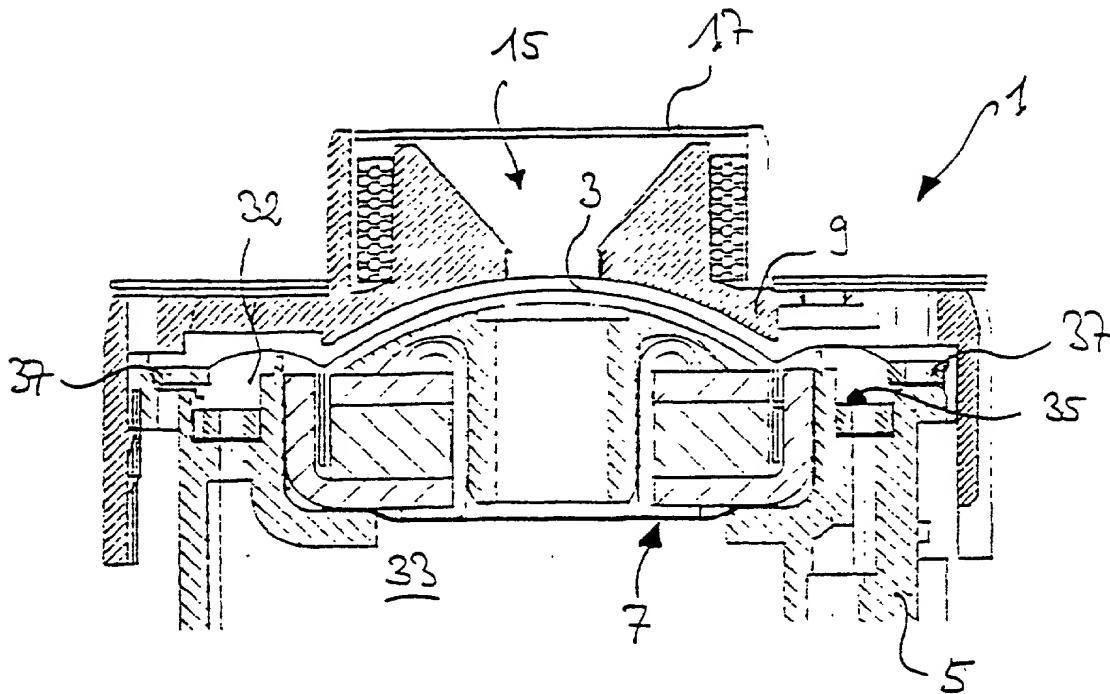


Fig. 5

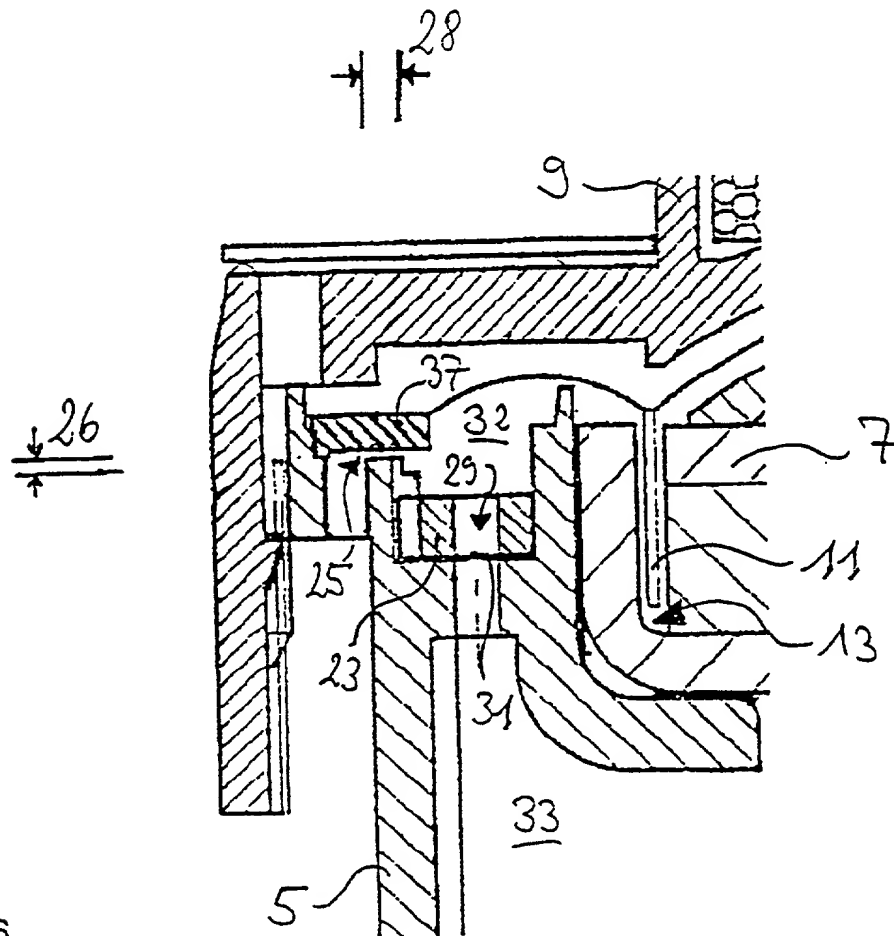


Fig. 6

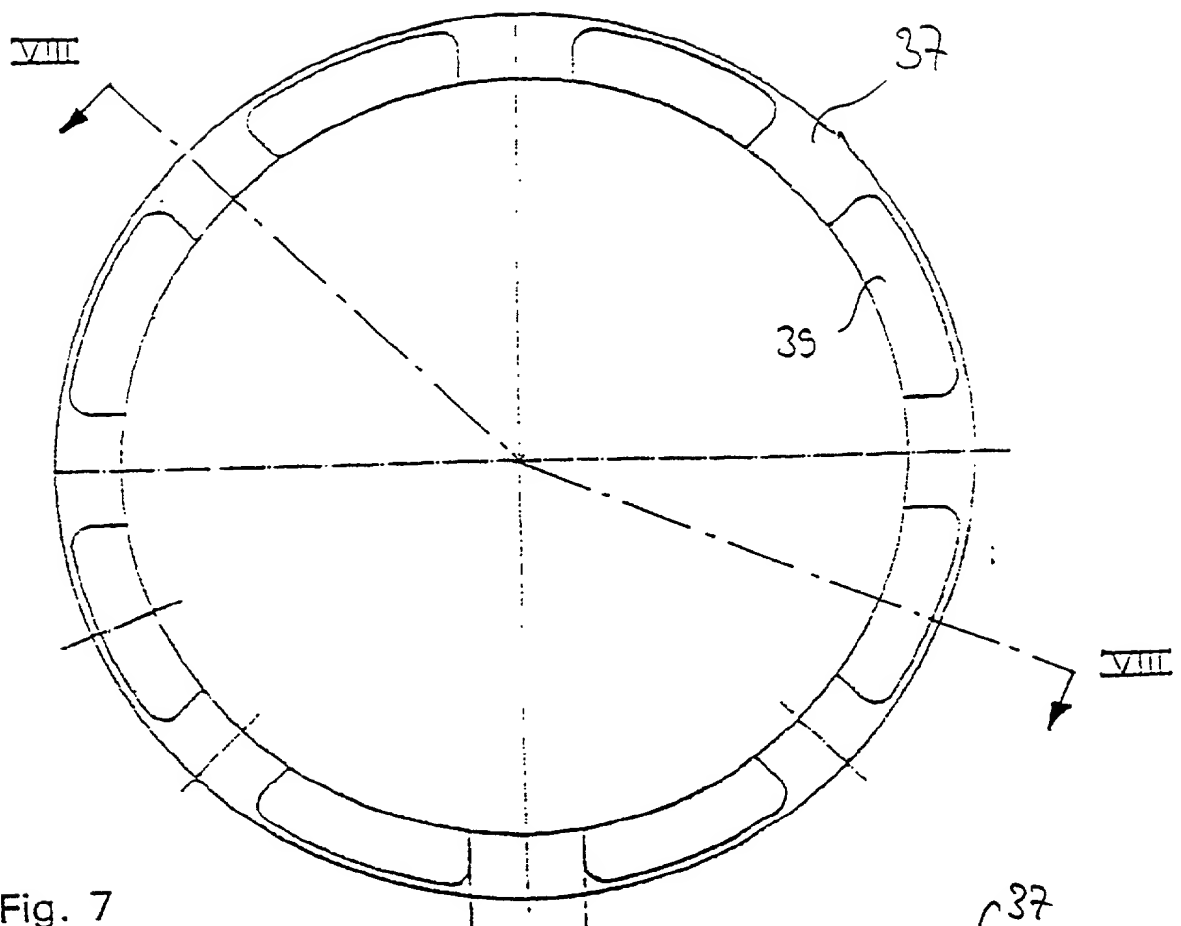


Fig. 7

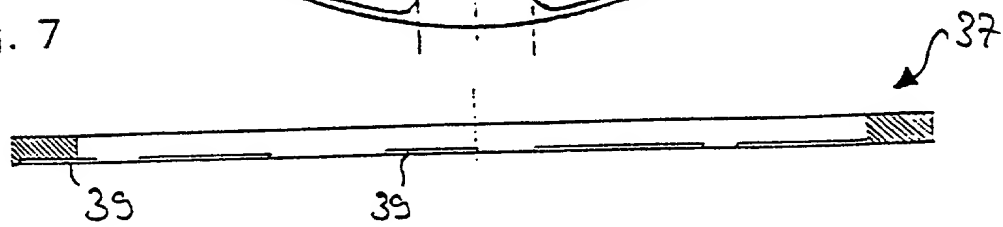


Fig. 8


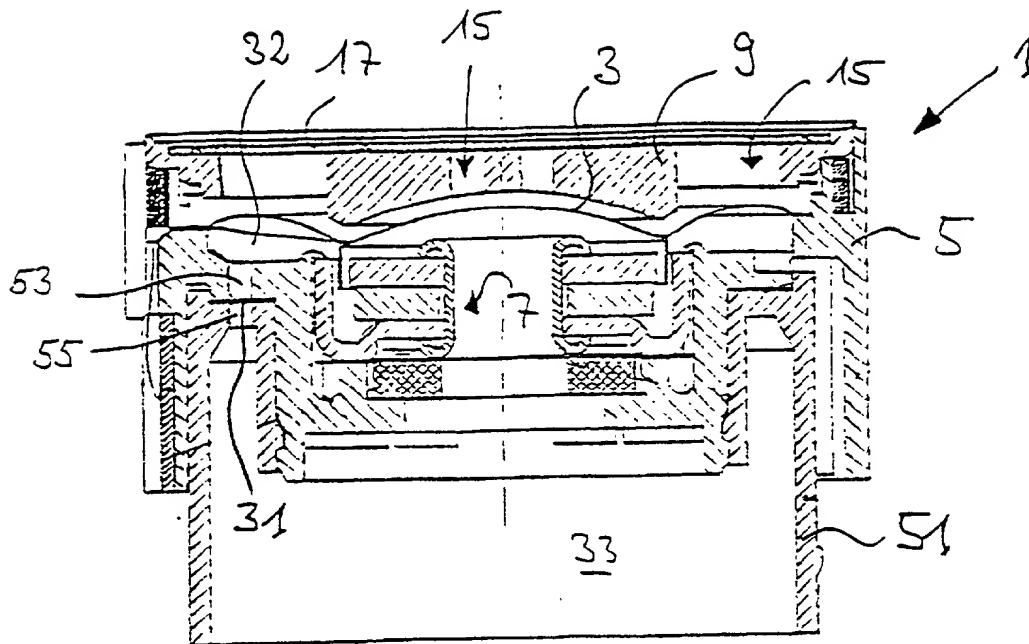


Fig. 9

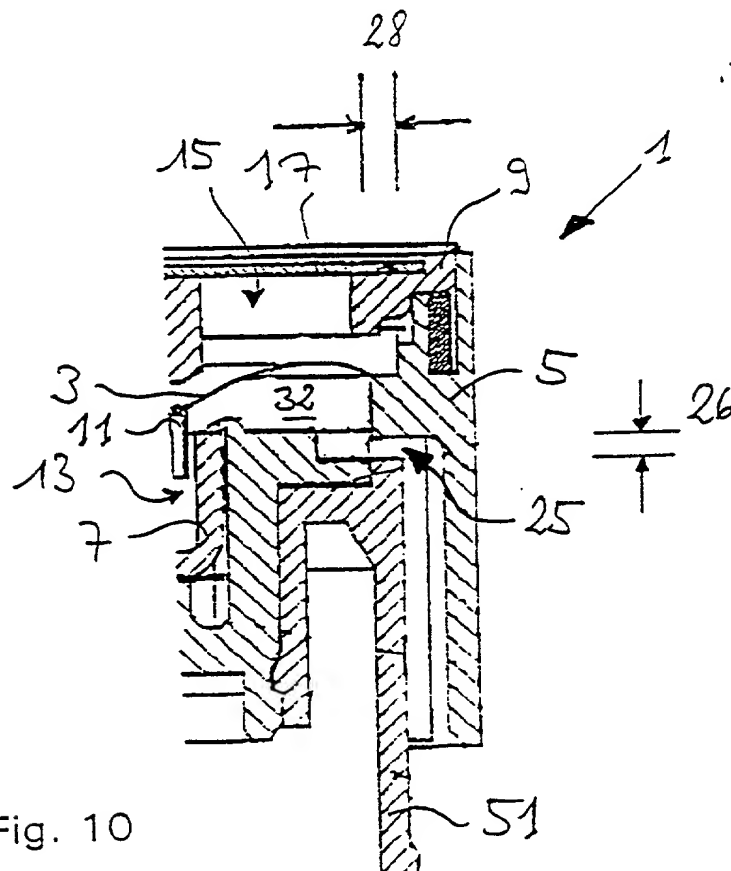

5/PRTS

09/830756
JC18 Rec'd PCT/PTO 3 0 APR 2001

Sennheiser electronic GmbH & Co. KG
Am Labor 1, 30900 Wedemark

Microphone

The invention concerns a microphone comprising a diaphragm which has a front diaphragm surface on which sound waves impinge and a rear diaphragm surface which is at least partially acoustically separated from the front diaphragm surface, and at least one, preferably slot-shaped, sound inlet, through which sound waves can go to the rear diaphragm surface.

DE 22 17 051 discloses such a microphone, in which an acoustic resistance is formed by the slot-shaped sound inlet, in order to damp the sound which passes through the slot-shaped sound inlet. The directional effect of the microphone can be influenced by the sound inlet between the air volume behind the diaphragm and the outside air. So that the slot-shaped sound inlet has the required acoustic resistance, the width thereof is small in relation to its length. In that case, the sound inlet is in the form of a groove-shaped recess in the magnet system which is made from sintered material. In known microphones of that kind the directional effect of the microphone is heavily frequency-dependent and can be used mostly only for low frequencies. Production of the corresponding slot-shaped sound inlets in the magnet system of sintered material requires special tools, and tuning of the directional effect by varying the slot-

shaped sound inlet can be implemented only by replacing the entire magnet system.

Therefore the object of the present invention is to develop a microphone of the kind set forth in the opening part of this specification,
5 in such a way that it has a predetermined directional effect substantially over the entire frequency response curve or characteristic and permits inexpensive automated manufacture.

In accordance with the invention, in the microphone of the kind set forth in the opening part of this specification, that object is attained in that
10 the microphone has at least one damping element and the slot-shaped sound inlet forms substantially an acoustic inductance so that at least a part of the sound waves to be picked up is passed with a delay to the rear diaphragm surface.

In such a microphone, the directional effect is achieved by a delay
15 in the sound which passes in through the rear sound inlet. The delay in the sound is achieved by means of an acoustic network which has essentially an inductance formed by the slot-shaped sound inlet and a separate damping or attenuating element which forms an acoustic resistance.

The advantages of the invention are in particular that it implements
20 a microphone with a directional effect which is constant substantially over the entire frequency range. In addition the acoustic network formed by the acoustic inductance and the damping element can be easily and precisely tuned so that the directional effect of the microphone can be
25 predetermined within wide limits.

Admittedly, a parasitic acoustic resistance occurs in the sound inlet of the microphone according to the invention. In order however to make the acoustic network substantially dependent on the magnitude of the acoustic inductance and that of the separate damping element, the sound
30 inlet in the microphone according to the invention is preferably of such a

configuration that the acoustic resistance which occurs in the sound passage is lower than the acoustic resistance of the damping element.

5 A preferred embodiment of microphone according to the invention provides that the damping element is formed by a sound passage which is provided with acoustic damping material and which connects a cavity to the volume delimited by the rear diaphragm surface. Tuning of the damping element is predetermined essentially by the size of the volume and the acoustic resistance of the sound passage which connects the cavity to the volume delimited by the rear diaphragm surface.

10 In a further preferred embodiment the sound inlet is of a substantially rectangular cross-section. That cross-sectional shape is easy to dimension in regard to the design of a microphone according to the invention and is easy to carry into effect in terms of manufacture. In that respect, the height of the sound inlet is particularly desirably smaller than
15 its length, in which case the sound flow takes place along the longitudinal direction of the sound inlet and the length of the sound inlet is in turn smaller than the width thereof. The parasitic resistance of the sound inlet is held at a low level by virtue of the fact that the width of the sound inlet is large in relation to the length. In a desirable development the width of
20 the sound inlet corresponds substantially to the periphery of the microphone. In that case, the sound inlet is interrupted only by support portions which are provided for the mechanical stability of the microphone and in particular the sound inlet. In this embodiment the sound inlet is thus formed not by narrow and long passages but by a substantially
25 peripherally extending slot which has an only slight parasitic acoustic resistance and a predetermined acoustic inductance.

In a further preferred embodiment the diaphragm is connected to a diaphragm fixing portion. The diaphragm fixing portion serves to carry the diaphragm and to orient it by way of a suitable magnet system in such a
30 way that an oscillating coil fixed to the diaphragm engages into an air gap provided in the magnet system.

In a further embodiment the microphone includes a closure element which is arranged in front of a mouth opening of the sound passage and which has an opening which substantially corresponds to the mouth opening of the sound passage and which is provided with the acoustic damping material. The closure element serves substantially to carry the acoustic damping material and to hold it in front of the mouth opening of the sound passage. The acoustic resistance of the damping element can be particularly advantageously changed by interchanging only the closure element and replacing it by another closure element with a different acoustic resistance. In that way microphone casings of the same structure can also be tuned differently by means of suitable closure elements.

In order to form the slot-shaped sound inlet through which sound waves can pass to the rear diaphragm surface, in a preferred embodiment of the microphone according to the invention the diaphragm fixing portion has an orifice which leads from the exterior to the rear diaphragm surface and which is substantially closed by a sealing element. In that arrangement the orifice is reduced by the sealing element to such an extent that the slot-shaped sound inlet is formed between the sealing element and the diaphragm fixing portion.

It is particularly advantageously possible in that way for the dimensions of the slot-shaped sound inlet to be predetermined by the sealing element which can be dimensioned and produced, independently of the diaphragm fixing portion. The microphone according to the invention can thus in turn be tuned in the desired manner by means of an inexpensive component which is simple to manufacture. There is therefore no longer any need for structural changes to the casing of the microphone or to other components which are to be manufactured with expensive tools. In that case, in a desirable development, the sealing element comprising a porous material and in particular a sintered material. Such material has a high level of internal damping which can improve the

acoustic properties of the microphone and it can be easily put into a desired shape.

In a desirable development the cross-section of the slot-shaped sound inlet is essentially formed by a recess in the diaphragm fixing portion, the length of the sound inlet being essentially predetermined by the thickness of the sealing element. In that case, the sealing element is preferably of a substantially annular configuration and fits in an annular groove provided in the diaphragm fixing portion. The cross-section of the slot-shaped sound inlet can be predetermined in a simple fashion by the difference in size between the inside diameter of the diaphragm fixing portion and the outside diameter of the sealing element, in which case recesses do not have to be provided at the diaphragm fixing portion. That makes it possible to provide slots of different dimensions, with the same diaphragm fixing portion, insofar as only the annular sealing element is replaced by a different one involving a different outside diameter.

If however the slot-shaped sound inlet is completely closed by the sealing element, then only the damping element is effective and the directional characteristic of the microphone approaches a spherical shape. Therefore the microphone according to the invention also affords the possibility of embodying a microphone with a spherical directional characteristic, with the same design configuration and structure in respect of the microphone capsule. If a directional characteristic of that kind is to be implemented, then desirably the slot-shaped sound inlet can also be entirely omitted, in which case the other advantageous features described herein can nonetheless be provided in such an embodiment.

In a particularly desirable feature in that case the sealing element which substantially predetermines the size of the slot-shaped sound inlet is formed in one piece with the closure element which is arranged in front of the mouth opening of the sound passage and which carries the acoustic damping material. In that way, both the acoustic inductance by virtue of influencing the dimensions of the slot-shaped sound inlet and the acoustic

resistance of the damping element by virtue of the choice of the acoustic damping material adopted can be particularly advantageously predetermined by means of a single component.

5 In an alternative embodiment the diaphragm fixing portion substantially surrounds the rear diaphragm surface and the sound inlet is formed between a holding portion provided on the diaphragm and the diaphragm fixing portion. The diaphragm fixing portion is essentially the portion of the diaphragm, with which the latter is connected to the diaphragm fixing portion. In a desirable development the holding portion
10 is formed by a diaphragm ring connected to the diaphragm. Such a diaphragm ring advantageously enhances the stability of the diaphragm and can be easily manufactured. That is found to be advantageous in particular for the reason that, in a desirable development of the invention, provided in the diaphragm ring are recesses which substantially form the slot-shaped sound inlet. The diaphragm fixing portion can therefore have
15 a substantially flat support contact surface for the diaphragm ring, wherein the dimensions of the slot-shaped sound inlet are predetermined by the recesses in the diaphragm ring. This embodiment also provides that the size of the slot-shaped sound inlet is formed by a component
20 which is convenient in terms of manufacture so that, with identical diaphragm fixing portions, it is possible to provide for tuning of the microphone by altering the diaphragm ring.

In a further alternative embodiment the diaphragm according to the invention has a casing portion which is connected to the diaphragm fixing
25 portion and which substantially encloses the rear diaphragm surface, in which case the sound inlet is formed between the diaphragm fixing portion and the casing portion.

Advantageous developments of the invention are characterized by the features of the appendant claims.

30 The invention is described by way of example hereinafter with reference to the drawings in which:

Figure 1 shows a view in cross-section through a first embodiment of a microphone according to the invention,

Figure 2 is a view on an enlarged scale of a part of Figure 1,

Figure 3 shows a plan view of a sealing element which is fitted in
5 the embodiment shown in Figure 1,

Figure 4 shows a view in cross-section through the sealing element taken along line IV-IV in Figure 3,

Figure 5 shows a second embodiment of the microphone according to the invention,

10 Figure 6 is a view on an enlarged scale of a part of Figure 5,

Figure 7 is a plan view of a diaphragm ring which is fitted in the embodiment shown in Figure 5,

Figure 8 is a view in cross-section of the diaphragm ring taken along line VIII-VIII in Figure 7,

15 Figure 9 shows a third embodiment of the microphone according to the invention, and

Figure 10 shows a view on an enlarged scale of part of Figure 9.

Figure 1 shows a first embodiment of a microphone according to the invention in cross-section, comprising a diaphragm 3, a diaphragm fixing
20 portion 5, a magnet system 7 and a microphone cover 9. The diaphragm 3 is connected with its outer edge to the diaphragm fixing portion 5 and thereby centered over the magnet system 7. An oscillating coil 11 secured to the diaphragm 3 extends substantially transversely with respect to the diaphragm 3 into an air gap 13 in the magnet system 7. On
25 its side towards the diaphragm 3 the microphone cover 9 is substantially matched to the contour of the diaphragm 3 and has a plurality of sound intake openings 15 through which sound to be picked up can impinge on the outside surface of the diaphragm 3. The sound intake openings 15 are covered by a sound-transmitting material 17 in order to protect the
30 diaphragm from fouling and contamination, in particular dust and moisture.

Also shown in Figure 1 and in the detail in Figure 2 is the diaphragm fixing portion 5 which has an orifice 19 leading from the exterior to the rear surface of the diaphragm 3. Provided in the diaphragm fixing portion is an annular groove 21, with the orifice 19 being provided in the annular groove 21 in the region of the edge between the bottom and the wall. Fitted in the annular groove 21 is a corresponding annular sealing element 23 which substantially closes the orifice 19 except for a slot-shaped sound inlet 25.

The acoustic properties of the microphone can be predetermined to a wide extent by varying the geometrical dimensions of the slot-shaped sound inlet 25. In the described embodiments, identified as the length 28 is that dimension of the sound inlet 25, along which the sound flow essentially passes. The width is essentially determined along the periphery of the microphone, and the height 26 of the sound inlet is defined by the spacing of two complementary components (5, 23; 5, 37; 5, 51) which delimit the sound inlet 25. Basically, in the illustrated embodiments of the invention, the height 26 of the sound inlet 25 is less than its length 28 and the length 28 of the sound inlet 25 is in turn less than the width thereof.

The height 26 (defined in the radial direction) of the slot-shaped sound inlet 25 as shown in Figures 1 and 2 is in this case essentially predetermined by a recess 27 provided in the diaphragm fixing portion 5 and the length 28 is predetermined by the thickness of the annular sealing element 23.

Provided on the annular sealing element 23 are ducts 29 which respectively form a sound passage, in a portion-wise manner. The ducts are provided with an acoustic damping material 31. The ducts 29 in the sealing element 23 connect the volume 32 delimited by the rear surface of the diaphragm 3 to a cavity 33 which is closed in an outward direction (not shown).

The cavity 33, together with the acoustic damping material 31 arranged in the ducts 29 in the sealing element 23, forms a damping element, wherein the acoustic damping value on the one side depends on the size of the cavity 33 while on the other side it depends on the acoustic properties of the ducts 29 and the damping material 31. The slot-shaped sound inlet 25 forms an acoustic inductance, the magnitude of which can be essentially predetermined by the geometrical dimensions involved. The acoustic inductance of the slot-shaped sound inlet 25, together with the damping element, forms an acoustic network which passes a part of the sound waves to be picked up, with a delay to the rear diaphragm surface.

Figure 3 shows an annular sealing element which is used for example in the first embodiment of the microphone as shown in Figures 1 and 2. Figure 4 is a view of the annular sealing element in cross-section taken along line IV-IV in Figure 3. The annular sealing element is of a substantially rectangular cross-section, with the sealing element 23 being provided with peripherally extending grooves 35 which are disposed in mutually opposite relationship on both sides. Provided in a portion-wise manner in the grooves 35 in the sealing element 23 are ducts 29 which are of the same width as the peripherally extending grooves 35 and which are substantially in the form of a slot. Arranged within the ducts 29 is an acoustic damping material 31 with which it is possible to predetermine the acoustic resistance of the ducts 29 in the sealing element 23.

Figures 5 and 6 show a second embodiment of a microphone according to the invention, Figure 5 showing a view in cross-section and Figure 6 showing a view on an enlarged scale of part of Figure 5. The microphone shown in Figures 5 and 6, like the microphone 1 in accordance with the first embodiment, also has a diaphragm 3, a diaphragm fixing portion 5 which carries the diaphragm 3, a magnet system 7, a microphone cover 9, an oscillating coil 11, an air gap 13 which is provided in the magnet system 7 and into which the oscillating coil 11 secured to

the diaphragm 3 at least partially engages, and a sound intake opening 15 which is covered by a sound-transmitting material 17.

In contrast to the first embodiment, in the case of the microphone 1 in accordance with the second embodiment the rear surface of the diaphragm 3 is substantially enclosed by the diaphragm fixing portion 5. The diaphragm fixing portion 5 has an annular groove 21 in a volume 32 which is delimited by the rear surface of the diaphragm 3. An annular sealing element 23 is arranged in the annular groove 21. The sealing element 23 is provided with ducts which are disposed in opposite relationship to adjoining sound passages which are formed in the diaphragm fixing portion 5 and which connect a cavity 33 (not shown completely) which is also enclosed by the diaphragm fixing portion 5, to the volume delimited by the rear diaphragm surface. The annular sealing element carries acoustic damping material 31 with which the acoustic resistance of the damping element formed by the cavity 33 and the acoustic damping material 31 can be predetermined.

A diaphragm ring 37 of a substantially rectangular cross-section is secured to the outer, peripherally extending edge of the diaphragm 3. Formed between the diaphragm ring 37 and the diaphragm fixing portion 5, in a portion-wise manner, is a slot-shaped sound inlet 25 through which sound waves can pass to the rear diaphragm surface. The slot-shaped sound inlet 25 is formed by virtue of the diaphragm ring 37 having shallow recesses 39 at its surface which is towards the diaphragm fixing portion 5. In this case, the length of the slot-shaped sound inlet 25 is determined by the part of the diaphragm fixing portion 5, which is in opposite relationship to the shallow recess 39 of the diaphragm ring 37. The height 26 of the slot-shaped sound inlet 25 can be predetermined by the size of the recess 39.

Figures 7 and 8 show a view in detail of a diaphragm ring according to the invention, more specifically Figure 7 being a view from below and Figure 8 being a view in cross-section taken along line VIII-VIII. In the

illustrated embodiment of the diaphragm ring 37, eight recesses 39 are arranged uniformly around the periphery. The recesses 39 extend radially outwardly from the inner peripherally extending edge, on the underneath surface of the diaphragm ring, the outer downwardly disposed edge of the diaphragm ring 37 being maintained continuously.

The microphone in a third embodiment which is shown as a view in cross-section in Figure 9 and as a view on an enlarged scale in Figure 10 has a separate casing portion 51 which is connected to the diaphragm fixing portion 5 and which substantially encloses the rear diaphragm surface. Also provided in the housing portion 51 is the cavity 33 which is connected by a sound passage provided with acoustic damping material 31, to the volume 32 connected through the rear diaphragm surface. In this case, the sound passage is formed by mutually oppositely disposed orifices 53 and 55 in the diaphragm fixing portion 5 and in the casing portion 51, wherein the acoustic material 31 is arranged and held between the diaphragm fixing portion 5 and the casing portion 51.

Formed between the diaphragm fixing portion 5 and the casing portion 51 is the slot-shaped sound inlet which represents the acoustic inductance. The height 26 (defined in the axial direction) and the length 28 of the slot-shaped sound inlet are predetermined by the diaphragm fixing portion 5 and/or the casing portion 51.

CLAIMS

1. A microphone (1) comprising a diaphragm (3) which has a front diaphragm surface on which sound waves impinge and a rear diaphragm surface which is at least partially acoustically separated from the front diaphragm surface, and at least one, preferably slot-shaped, sound inlet (25), through which sound waves can go to the rear diaphragm surface, characterized in that the microphone (1) has at least one damping element (29, 31, 33) and the slot-shaped sound inlet (25) substantially forms an acoustic inductance so that at least a part of the sound waves to be picked up is passed with a delay to the rear diaphragm surface.

2. A microphone as set forth in claim 1 characterized in that the acoustic resistance occurring in the sound inlet (25) is less than the acoustic resistance of the damping element.

3. A microphone as set forth in claim 1 or claim 2 characterized in that the damping element is formed by a sound passage (29) which is provided with acoustic damping material (31) and which connects a cavity (33) to the volume (32) delimited by the rear diaphragm surface.

4. A microphone as set forth in one of the preceding claims characterized in that the sound inlet (25) is of a substantially rectangular cross-section.

5. A microphone as set forth in claim 4 characterized in that the height (26) of the sound inlet (25) is less than the length (28) thereof, wherein the sound flow is along the longitudinal direction of the sound inlet (25) and the length (28) of the sound inlet (25) is in turn less than the width thereof.

6. A microphone as set forth in claim 5 characterized in that the width of the sound inlet (25) substantially corresponds to the periphery of the microphone (1).

7. A microphone as set forth in claim 6 characterized in that the sound inlet (25) is interrupted only by support portions.

8. A microphone as set forth in one of the preceding claims characterized in that the diaphragm (3) is connected to a diaphragm fixing portion (5).

9. A microphone as set forth in claims 3 and 8 characterized by a closure element which is arranged in front of a mouth opening of the sound passage (29) and has an opening which substantially corresponds to the mouth opening of the sound passage (29) and which is provided with the acoustic damping material (31).

10. A microphone as set forth in claim 8 or claim 9 characterized in that the diaphragm fixing portion (5) has an orifice (19) which leads from the exterior to the rear diaphragm surface and which is substantially closed by a sealing element (23), the slot-shaped sound inlet (25) being formed between the sealing element (23) and the diaphragm fixing portion (5).

11. A microphone as set forth in claim 10 characterized in that the sealing element (23) comprises a porous material, in particular a sintered material.

12. A microphone as set forth in claim 10 or claim 11 characterized in that the cross-section of the slot-shaped sound inlet (25)

is substantially formed by a recess (27) in the diaphragm fixing portion (5), the length (28) of the sound inlet (25) being substantially predetermined by the thickness of the sealing element (23).

13. A microphone as set forth in one of claims 8 through 12 characterized in that sealing element (23) is substantially annular.

14. A microphone as set forth in claim 13 characterized in that the diaphragm fixing portion (5) has an annular groove (21) in which the sealing element (23) is arranged.

15. A microphone as set forth in claim 13 or claim 14 characterized in that the cross-section of the slot-shaped sound inlet (25) is predetermined by the difference in size between the inside diameter of the diaphragm fixing portion (5) and the outside diameter of the sealing element (23).

16. A microphone as set forth in one of claims 8 through 15 characterized in that the sealing element (23) is in one piece with the closure element.

17. A microphone as set forth in claim 8 or claim 9 characterized in that the diaphragm fixing portion (5) substantially encloses the rear diaphragm surface and the sound inlet (25) is formed between a holding portion (37) on the diaphragm and the diaphragm fixing portion (5).

18. A microphone as set forth in claim 17 characterized in that the holding portion (37) is a diaphragm ring (37) connected to the diaphragm (3).

19. A microphone as set forth in claim 18 characterized in that the slot-shaped sound inlet (25) is formed substantially by recesses (39) in the diaphragm ring (37).

20. A microphone as set forth in claim 8 characterized by a casing portion (51) which is connected to the diaphragm fixing portion (5) and which substantially encloses the rear diaphragm surface, the sound inlet (25) being formed between the diaphragm fixing portion (5) and the casing portion (51).



21. A microphone (1) comprising a diaphragm (3) which has a front diaphragm surface on which sound waves impinge and a rear diaphragm surface acoustically separated from the front diaphragm surface, characterized in that the microphone (1) has at least one damping element (29, 31, 33) formed by a sound passage (29) which is provided with acoustic damping material (31) and which connects a cavity (33) to the volume (32) delimited by the rear diaphragm surface.

Abstract

The invention concerns a microphone comprising a diaphragm which has a front diaphragm surface on which sound waves impinge and a rear diaphragm surface which is at least partially acoustically separated from the front diaphragm surface, and a sound inlet, through which sound waves can go to the rear diaphragm surface.

In order to improve a strongly frequency-dependent frequency response characteristic, which can be achieved by a microphone of that kind, in respect of the directional effect of the microphone, it is proposed that the microphone of the kind set forth in the opening part of this specification includes at least one damping element and the slot-shaped sound inlet forms substantially an acoustic inductance so that at least a part of the sound waves to be picked up is passed with a delay to the rear diaphragm surface.

(Figure 1).



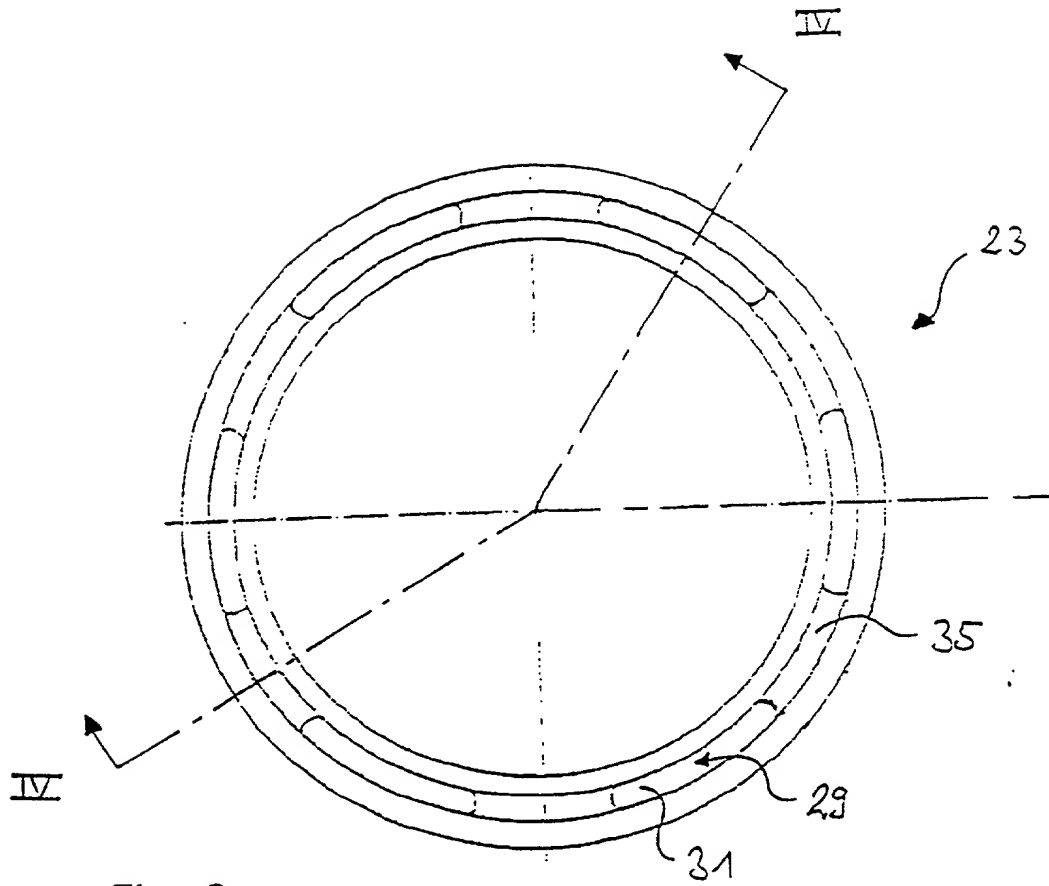


Fig. 3

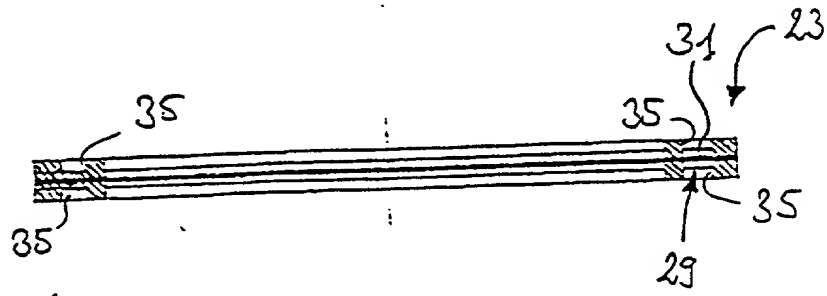


Fig. 4

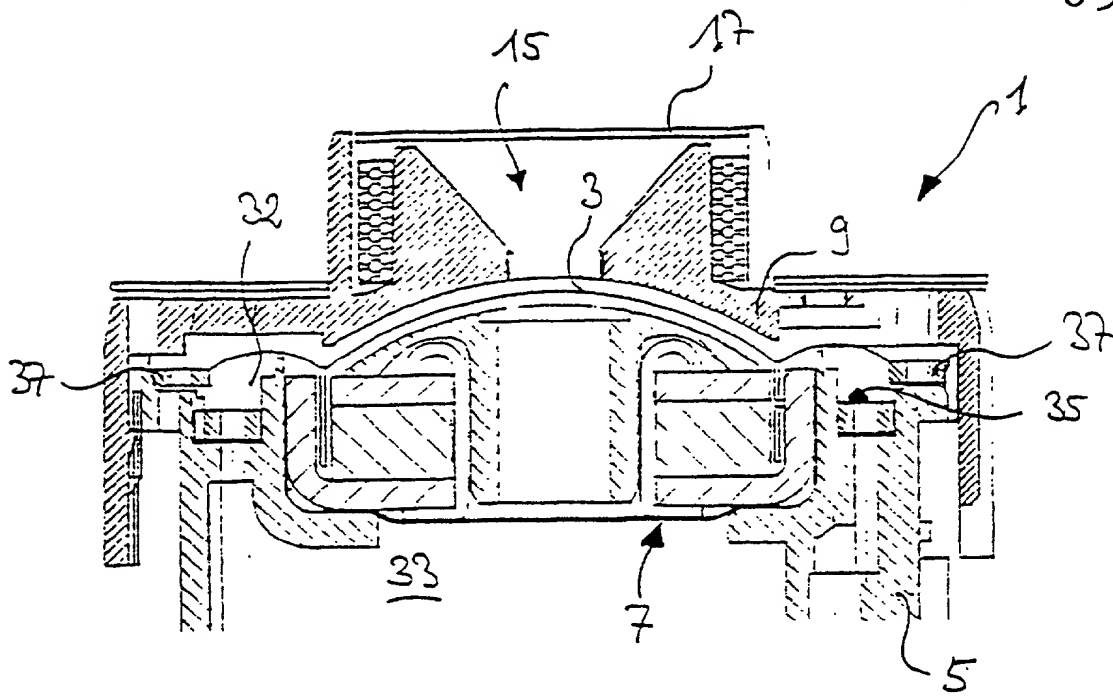


Fig. 5

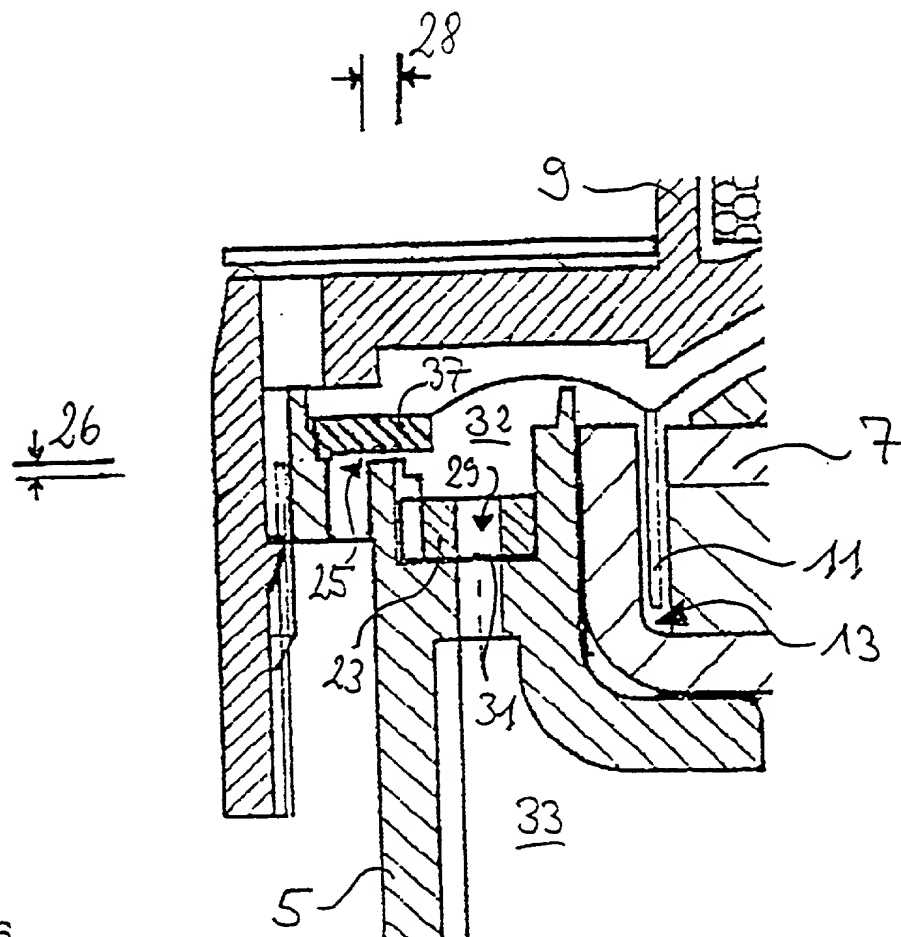


Fig. 6

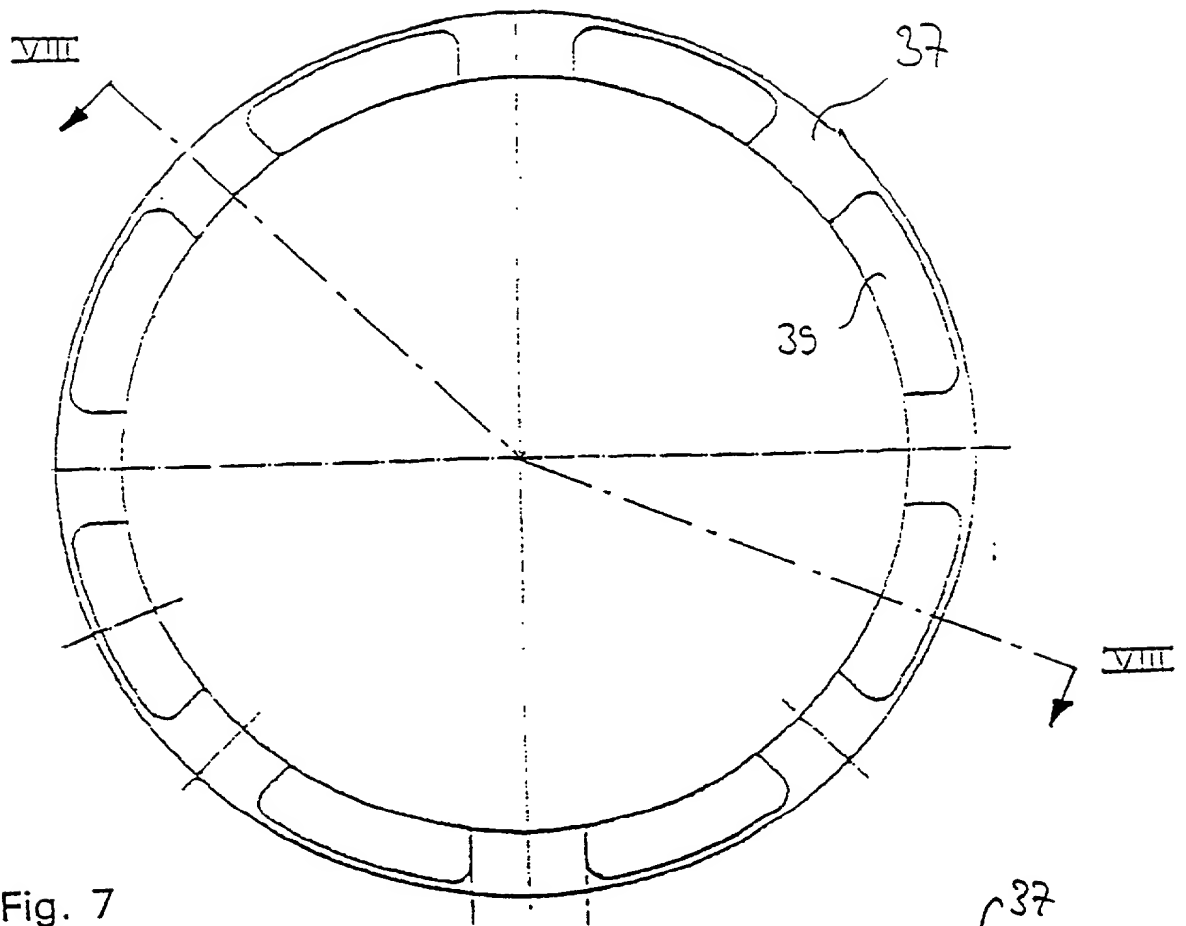


Fig. 7

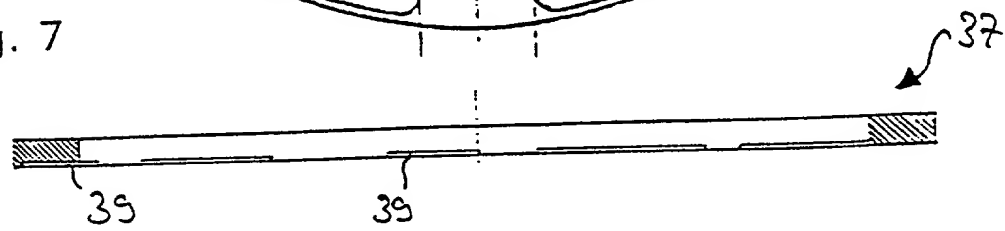


Fig. 8

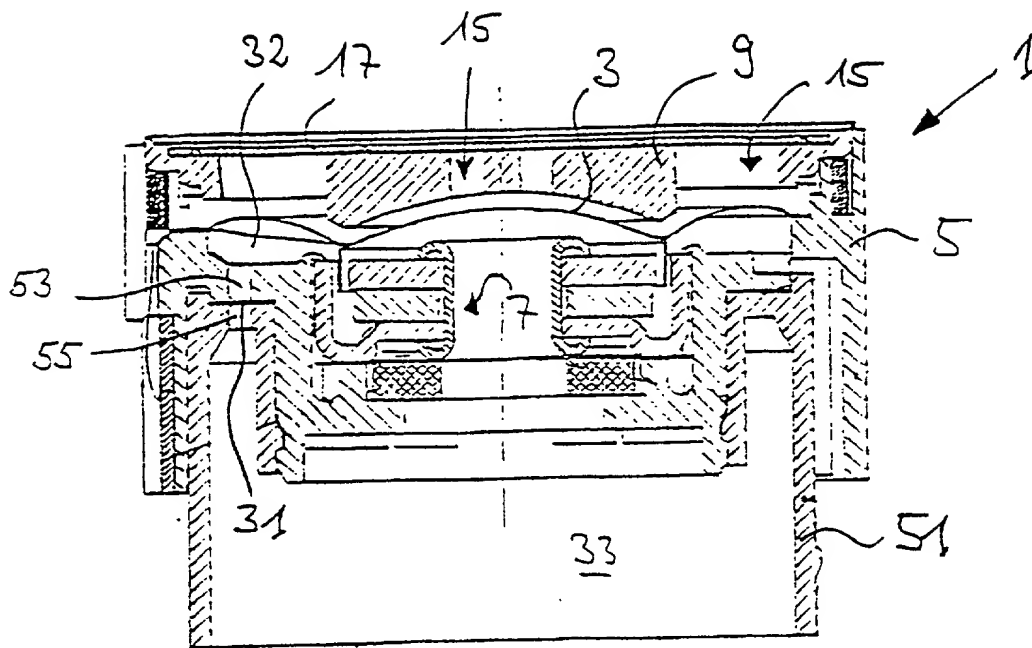


Fig. 9

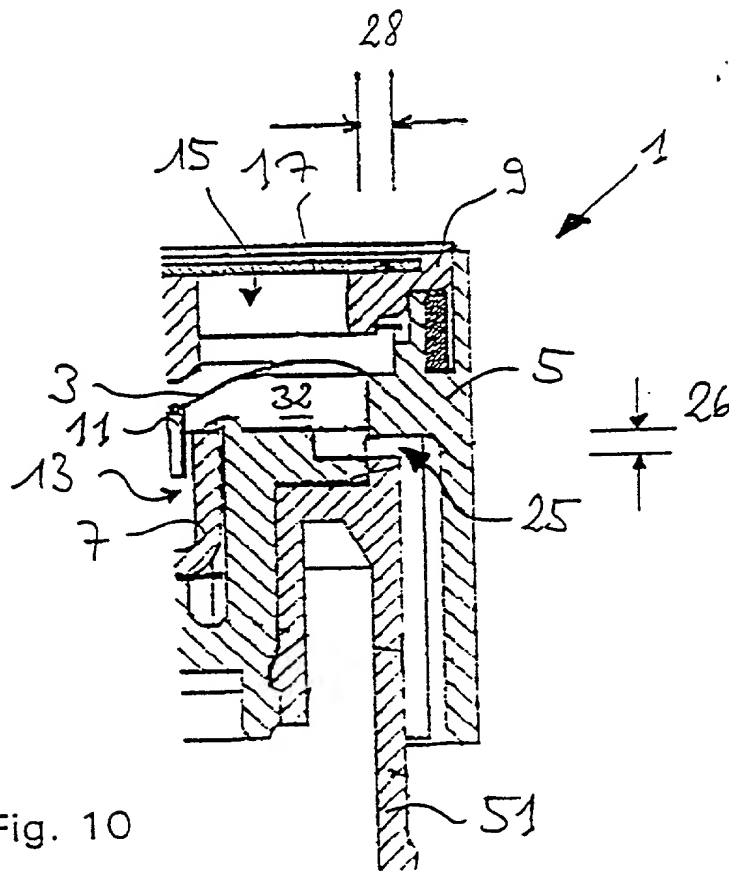


Fig. 10

UNITED STATES OF AMERICA
COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

FILE NO. GK-EIS-1041/
500593.20033

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

MICROPHONE

the specification of which

- ☐ is attached hereto.
☐ was filed on _____ as United States patent application Serial Number _____.
☒ was filed on October 16, 1999 as PCT international patent application No. PCT/EP99/07869
and was amended on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Germany	198 50 298.2	30 October 1998	YES <u>x</u> NO _____
			YES _____ NO _____

I hereby appoint REED SMITH LLP and the members of the firm: Lloyd McAulay, Reg. No. 20,423; J. Harold Nissen, Reg. No. 17,283; Jules E. Goldberg, Reg. No. 24,408; Gerald H. Kiel, Reg. No. 25,116; Eugene LeDonne, Reg. No. 35,930; Stephen Chin, Reg. No. 39,938; Arthur Dresner, Reg. No. 24,403; Daniel Lent, Reg. No. 44,867; and Samir R. Patel, Reg. No. 44,998 as attorneys with full power of substitution and revocation to prosecute all business in the Patent & Trademark Office connected therewith and to receive all correspondence.

SEND CORRESPONDENCE TO: Gerald H. Kiel, Esq.
REED SMITH, LLP
375 Park Avenue
New York, New York 10152-1799, U.S.A.

DIRECT TELEPHONE CALLS TO: (212) 521-5400

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR <u>Heinz EPPING</u>		INVENTOR'S SIGNATURE <u>[Signature]</u>	DATE <u>3.7.01</u>
RESIDENCE <u>31134 Hildesheim</u> <u>31535 Neustadt, Germany</u>		COUNTRY OF CITIZENSHIP <u>Germany</u>	
POST OFFICE ADDRESS <u>Weinberg 64 B, 31134 Hildesheim</u> <u>von Berckefeld Str. 5A, 31535 Neustadt, Germany</u>			
FULL NAME OF SECOND INVENTOR (IF ANY) <u>Manfred BLEICHWEHL</u>		INVENTOR'S SIGNATURE <u>[Signature]</u>	DATE <u>3.7.01</u>
RESIDENCE <u>30449 Hannover 91, Germany</u>		COUNTRY OF CITIZENSHIP <u>Germany</u>	
POST OFFICE ADDRESS <u>Deisterstr. 37N</u> <u>Falkenstr. 24, 30449 Hannover 91, Germany</u>			

☒:

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION (continued)		File No. GK-EIS-1041/ 500593.20033	
FULL NAME OF THIRD INVENTOR (IF ANY) Artur SEEHAFFER		INVENTOR'S SIGNATURE <i>Artur Seehaffer</i>	
RESIDENCE 38179 Schwuelper, Germany DEX		DATE 20.6.2007	
COUNTRY OF CITIZENSHIP Germany			
POST OFFICE ADDRESS Sandweg 13, 38179 Schwuelper, Germany			
FULL NAME OF FOURTH JOINT INVENTOR (IF ANY)		INVENTOR'S SIGNATURE	
RESIDENCE		DATE	
COUNTRY OF CITIZENSHIP			
POST OFFICE ADDRESS			
FULL NAME OF FIFTH INVENTOR (IF ANY)		INVENTOR'S SIGNATURE	
RESIDENCE		DATE	
COUNTRY OF CITIZENSHIP			
POST OFFICE ADDRESS			
FULL NAME OF SIXTH JOINT INVENTOR (IF ANY)		INVENTOR'S SIGNATURE	
RESIDENCE		DATE	
COUNTRY OF CITIZENSHIP			
POST OFFICE ADDRESS			
FULL NAME OF SEVENTH JOINT INVENTOR (IF ANY)		INVENTOR'S SIGNATURE	
RESIDENCE		DATE	
COUNTRY OF CITIZENSHIP			
POST OFFICE ADDRESS			
FULL NAME OF EIGHTH JOINT INVENTOR (IF ANY)		INVENTOR'S SIGNATURE	
RESIDENCE		DATE	
COUNTRY OF CITIZENSHIP			
POST OFFICE ADDRESS			
FULL NAME OF NINTH JOINT INVENTOR (IF ANY)		INVENTOR'S SIGNATURE	
RESIDENCE		DATE	
COUNTRY OF CITIZENSHIP			
POST OFFICE ADDRESS			